DX
13, 22, 26
kW

POWERPROTECT
Standby Generators

BRIGGS&STRATTON
ENERGY SOLUTIONS

10 YEAR WARRANTY
PARTS - LABOR - TRAVEL

DX

Crafted with innovation and engineered to tackle any challenge, the Briggs & Stratton® PowerProtect DX Generator series offers the ultimate solution for a home's power demands. From the compact 13kW[1] model to the industry's most powerful air-cooled generator at 26kW[1], our line is backed by the most comprehensive warranty[2] and service network in the industry.

FEATURES

Highest Rated Power Output on Natural Gas[8]
Engineered with NGMax for superior power and performance with convenient hookups for both liquid propane and natural gas.

13kW Compact Size
The smallest generator footprint in its class[5]. Upright design provides the smallest footprint possible so it's easier to install in tight areas. The front exhaust design allows for ultimate installation versatility.

Industry's Most Powerful
Worry-free backup power with the industry's most powerful air-cooled generator.

Assembled and Engineered in USA
Briggs & Stratton generators are designed and assembled in the USA.[4]

Superior Motor Starting
Best motor starting in the industry[3] to ensure smooth operation of your large appliances during startup. Up to 68% more power[3] than the competition.

Quiet Weekly Test Mode
70% quieter during weekly test mode.[9]

Power Management System (optional)
Customizable to your home's power needs, the Symphony® Choice Power Management system offers prioritized whole house power with a more affordable standby generator.

Corrosion Protection
Reinforced, corrosion-resistant aluminum enclosures and bases with Dura-Zen™ coating for a long-lasting attractive appearance.

POWERPROTECT™
Standby Generators

BRIGGS&STRATTON
ENERGY SOLUTIONS

Eco-Cise™ Weekly Test Mode
Our short 16-second weekly test mode ensures your generator is in top operating condition while reducing noise and fuel consumption.

Flexible Installation & Maintenance
Approved for installation as close as 18" to a building[5] with easy toolless panel removal for serviceability and maintenance.

Vanguard® Commercial-Grade Engine
Powerful engine built in the USA for commercial applications providing power for electronics.

Suitable for Off-Grid use or Demand Response Programs
Certified for non-emergency use, partner with your utility company's demand response program to receive incentives for helping reduce the overall load on the power grid.

In-House Call Support
Enjoy direct access to our US-based Briggs & Stratton energy experts whenever you need them aluminum enclosure to resist rust, and powder-coated paint for years of protection against chips and abrasions.

Engineered with
NGMax™
for superior power and performance

When choosing a standby generator, check the specifications closely. **Only Briggs & Stratton PowerProtect generators feature NGMax™ technology, delivering up to 13% more power on natural gas than the competition.** For homes with natural gas, Briggs & Stratton is the ideal choice.

Learn More
energy. briggsandstratton.com/powerprotect

ENGINEERED & ASSEMBLED IN THE USA

POWERPROTECT™
Standby Generators

BRIGGS&STRATTON
ENERGY SOLUTIONS

Most comprehensive warranty in the industry over time.[2]

Coverage for 10 years on parts, labor, and travel through the entire warranty period. This extended warranty is offered to every model in the PowerProtect DX lineup - a value up to $1,225.

10 YEAR WARRANTY
PARTS · LABOR · TRAVEL

Air-Cooled DX Warranty Comparison	Mileage	Labor	Parts	Major Components
Briggs & Stratton - 10 years	**10 years**	**10 years**	**10 years**	**10 years**
Generac - 5 years	2 years	2 years	3 years	5 years
Kohler - 5 years	5 years	5 years	5 years	5 years

Generator Set Rating			
Model Name	PPDX13	PPDX22	PPDX26
Model Number	040740	040780	040800
Running Power (Liquid Propane/Natural Gas) kW[1]	13 / 11.5	22 / 22	26 / 24
Running Amperage (Liquid Propane/Natural Gas) Amps	54.2 / 47.9	91.7 / 91.7	108.3 / 100
Voltage	120 / 240	120 / 240	120 / 240
Circuit Breaker Amps	70	100	125
Motor Start Capability (kVA)	37	45	65.5

Engine	
Manufacturer	Vanguard®
Frequency Regulation Steady State	+/-1.0%

Sound Rating[7]	PPDX13	PPDX22	PPDX26
Low Idle Mode Sound	65 dBA	64 dBA	63 dBA
Normal Operating Sound[7]	69 dBA	68 dBA	65 dBA

Fuel Consumption[6]	PPDX13	PPDX22	PPDX26
No Load (BTU/hr)	NG - 65,000 / LP - 70,000	NG - 108,000 / LP - 107,000	NG - 122,000 / LP - 123,000
Half Load (BTU/hr)	NG - 119,000 / LP - 154,000	NG - 194,000 / LP - 217,000	NG - 206,000 / LP - 235,000
Full Load (BTU/hr)	NG - 212,000 / LP - 258,000	NG - 281,000 / LP - 368,000	NG - 323,000 / LP - 427,000

Available Accessories	PPDX13	PPDX22	PPDX26
Oil Warmer	6922	6840	
Battery Warmer	6921	6869	
Maintenance Kit	6873	6872	
Fuel Regulator Warmer	6845		
Surge Protector	6631		
InfoHub™ Universal - Cellular	6574		

Product Dimensions	PPDX13	PPDX22	PPDX26
Overall Dimensions (in / mm)	28.5 x 25.5 x 37.6 / 724 x 647 x 955	46.5 x 26.8 x 28.4 / 1181 x 681 x 721	46.5 x 26.8 x 28.4 / 1181 x 681 x 721
Packaged Dimensions (in / mm)	39.0 x 33.5 x 45.0 / 991 x 851 x 1143	48.8 x 30.5 x 50.5 / 1240 x 775 x 1283	48.8 x 30.5 x 50.5 / 1240 x 775 x 1283
Assembled Weight (lbs / kg)	315 / 143	465 / 210	540 / 245
Packaged Weight (lbs / kg)	370 / 168	540 / 245	625 / 285

POWERPROTECT™
Standby Generators

BRIGGS&STRATTON
ENERGY SOLUTIONS

13kW (PPDX13)

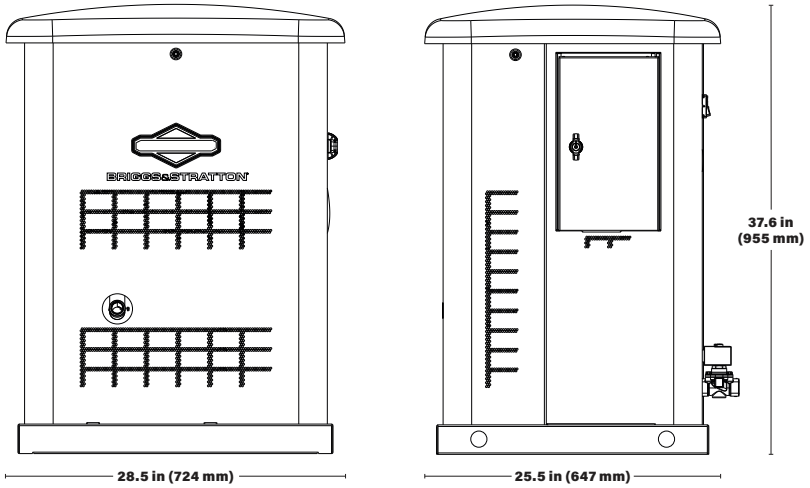

22kW & 26kW (PPDX22, PPDX26)

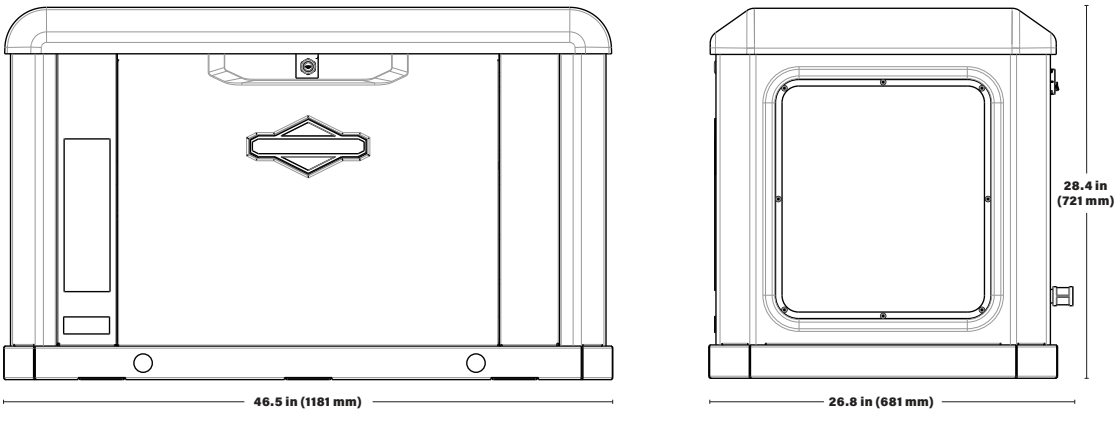

[1] This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-14 (motor and generators).

[2] See operator's manual or energy.briggsandstratton.com for complete warranty details.

[3] In its named class

[4] Of global and U.S. parts

[5] The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home or business.

[6] Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.

[7] Per ISO 3744. Sound level measurement at other locations around generator may differ depending on installation, based on lowest microphone at 7m. Normal operation based on average household usage.

[8] Compared to other leading home standby generators of similar power output.

[9] Compared to full load based on lowest microphone at 7 meters.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice.

This standby generator is not for Prime Power applications.

Please visit energy.briggsandstratton.com for the latest information.

BS1300 - 06-06-24

BRIGGS & STRATTON
POST OFFICE BOX 702
MILWAUKEE, WI 53201 USA

Copyright © 2024 Briggs & Stratton. All rights reserved.